



Research Article

VARIATION OF ULTRASONIC VELOCITY AND SOME ACOUSTIC PARAMETERS OF TERNARY LIQUID MIXTURE OF METHANOL ETHANOL 1BENZENE WITH TEMPERATURE

Diikko AbdulAziz Bamanga¹, Eyube Edwin Samson¹, Pascal Timtere¹, Oriolowo Niyi Zara²

¹Department of Physics, Modibbo Adama University of Technology, Yola, Nigeria

²Department of Electrical Engineering, Modibbo Adama University of Technology, Yola, Nigeria

Correspondence should be addressed to **Diikko AbdulAziz Bamanga**

Received April 22, 2015; Accepted April 22, 2015; Published June 25, 2015;

Copyright: © 2015 **Diikko AbdulAziz Bamanga** et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Cite This Article: AbdulAziz Bamanga, D., Edwin Samson, E., Timtere, P., Niyi Zara, O.(2015). Variation of Ultrasonic Velocity and Some Acoustic Parameters of Ternary Liquid Mixture of Methanol Ethanol 1Benzene with Temperature. The International Journal of Physics, 1(1). 1-4

ABSTRACT:

The density, viscosity and ultrasonic velocity have been measured for ternary mixture of Methanol+Ethanol+Benzene of fixed equal volumes of the components at temperatures of 303.15 K, 308.15 K, 313.15 K, 318.15 K, 323.15 K and 328.15 K. The experimental data have been used to calculate some acoustic and thermodynamic parameters: adiabatic compressibility, free length, free volume, and internal pressure. It was observed that adiabatic compressibility (β), free length (L_f), and free volume (V_f), increased with increase in temperature, whereas internal pressure (π_i) decreased with increase in temperature. Some probable reasons for the increase or decrease of acoustic and thermodynamic parameters with temperature change are presented.

KEYWORDS: Ternary mixtures, Ultrasonic velocity, Acoustic/Thermodynamic Parameters, temperature.

INTRODUCTION

Ultrasonic investigation of liquid mixtures containing components is of considerable importance in understanding intermolecular interaction between the component molecules as that finds application in several industrial and technological processes. Ultrasonic velocity and the derived acoustical parameters like adiabatic compressibility, free length, relaxation time, acoustic impedance, etc., with their excess values, provide valuable information about the molecular environments. This has been studied for various binary and ternary mixtures with respect to variation in concentration of the liquids and temperatures [3], [6], [9].

The ultrasonic study of liquids is of immense important in understanding the nature and strength of molecular

interactions. The biological activity of drug molecules and the activation energy of the metabolic process basically depend on the type and strength of the intermolecular interactions. Thermodynamic and transport properties of liquid mixtures have been extensively used to study the departure of a real liquid mixture behavior from ideality. From the literature, the nature and degree of molecular interactions in different solutions depend upon the nature of solvent, the structure of solute molecule and extent of solutes taking place in the solution [3],[1]

In recent years ultrasonic investigations find large number of applications in characterizing of thermodynamic and physiochemical aspect of ternary liquid mixtures. The acoustical and thermodynamic parameter have been used to study different kinds of associations, molecular motion and various types of interaction and their strengths

influenced by the size of pure component and the mixtures [2],[3]

The accurate thermodynamic properties of alcohols are of interest for different branches of science and engineering. Alcohols are important industrial chemical fluids, and some are used as solvent in the pharmaceutical industry. Hydrogen bonding is one of the most important types of intermolecular interactions play an important role in various physicochemical, biological and industrial processes[9],[3], [5]

In this paper, variation of some parameters of ternary mixture containing methanol, ethanol and Benzene with temperature have been studied for a fixed concentration of equal volumes of the individual liquids making up the mixture.

MATERIALS AND METHODS

A concentration in volume fraction of the mixture was prepared by taking liquids of methanol, ethanol (BDH grades, 99.4% v/v) and benzene. The volume fractions of the component liquids making the mixture were kept constant in the ratio of 1:1:1 throughout the variation of temperature. The density, viscosity, and ultrasonic velocity were measured as a function of temperature of the ternary liquid mixture at 2 MHz and at temperatures of T = 303.15 K, 308.15 K, 313.15 K, 318.15 K, 323.15 K and 328.15 K.

The density of the various systems at different temperatures were measured using relative measurement method and the viscosity of the mixture was measured using an Ostwald's viscometer. The flow time was determined using a digital stopwatch with an accuracy of ±0.01s, [4]. The ultrasonic velocity of the liquid mixture was measured using a single crystal variable path interferometer at 2 MHz. The selected temperature of the liquid mixture was maintained constant by circulating water from a thermostatically controlled water bath with an accuracy of ±0.1 K.

Some acoustic and thermodynamic parameters were calculated [3],[1],[6]:

(i) Adiabatic compressibility (β)

$$\beta = 1/U^2\rho \tag{1}$$

(ii) Intermolecular free length (L_f)

$$L_f = K_T\beta^{1/2}, \tag{2}$$

(iii) Free volume (V_f)

$$V_f = (M_{eff}U/k\eta)^{3/2}, \tag{3}$$

(iv) Internal pressure (π_i)

$$\pi_i = bRT(k\eta/U)^{1/2}(\rho^{2/3}/M_{eff}^{7/6}), \tag{4}$$

where U is ultrasonic velocity, ρ is density of the mixture, K_T is the temperature-dependent constant known as Jacobson's constant ($K_T = 2.131 \times 10^{-6}$ at 318K), M_{eff} is the effective molecular weight of the mixture ($M_{eff} = \sum miXi$), where mi and Xi are the molecular weight and mole fraction of individual constituents, respectively), k is a temperature-independent constant which is equal to 4.281×10^9 for all liquids, η is the viscosity of the mixture, b stands for cubic packing, which is assumed to be 2 for all liquids, T is the absolute temperature in Kelvin, R is the universal gas constant, k_B is Boltzmann's constant, and h is Planck's constant, f is the frequency of ultrasonic wave.

RESULTS AND DISCUSSION


The experimental data relating to density, viscosity, and ultrasonic velocity at indicated temperatures for frequency 2MHz, for the given mixture, and calculated values of adiabatic compressibility, free length, free volume, internal pressure have been presented in Table 1.

Table 1: Density (ρ), viscosity (μ) velocity (U), adiabatic compressibility (β), free length (L_f), free volume (V_f) and internal pressure (π_i) of methanol + ethanol+benzene mixture

T(K)	$\rho(\text{kg/m}^3)$	$\mu(\times 10^3 \text{ Nsm}^{-2})$	U(msec ⁻¹)	$\beta (\times 10^{10} \text{ Pa}^{-1})$	$L_f (\times 10^{11} \text{ m})$	$V_f \times 10^7 \text{ m}^3 \text{ mol}^{-1}$	$\pi_i \times 10^8 \text{ Pa}$
303	771.2	1.4942	13012.9	7.4149	5.4114	0.7333	5.2725
308	768.4	1.2436	1285.6	7.7323	5.6113	0.8445	5.1527
313	766.1	1.1547	1262.2	7.9438	5.7632	0.9375	5.0498
318	764.4	1.1023	1238.4	8.1132	6.0963	1.0034	4.9025
323	761.3	1.0534	1217.6	8.2837	6.4364	1.0464	4.7014
328	759.2	1.0046	1200.4	8.4663	6.8356	1.1067	4.4154


It can be observed from Table 1 and Figure 1 & Figure 2, that the density, viscosity and ultrasonic velocity decrease with increase in temperature. The decrease of values with temperature shows a decrease in intermolecular forces due to the increase in the thermal energy of the system. The velocity decreases with the increase in temperature because the fact that free length increases with the increase of temperature. Since the association of the interacting molecules varies with the temperature of the ultrasonic wave, cohesive force as well as internal pressure increases with the increase of temperature [6][5].[3]

Figure 1: Variation of ultrasonic velocity U (msec⁻¹) with temperature T (K)

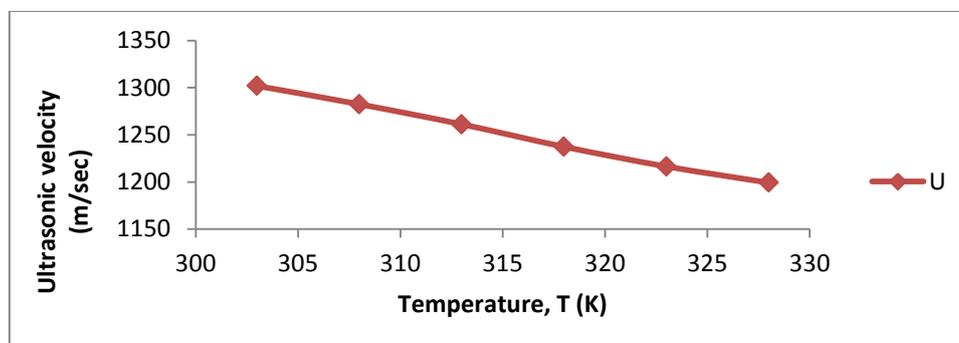

However, adiabatic compressibility (β), free length (L_f), free volume (V_f) and except internal pressure (π_i) increased with increase in temperature. The free length dependence on the adiabatic compressibility and show a similar behavior to that of the compressibility and inverse to that of velocity. It increased with increase in temperature of mixture, indicating that there is a less interaction between solute molecules. Free volume of the mixture increased as the internal pressure decreased with increase in temperature of mixture. This is most likely because of the loose packing of the molecules inside the shield, which may be brought about by the decreasing magnitude of interactions [7].[3]

Figure 2: Variation of adiabatic compressibility β ($\times 10^{10} \text{Pa}^{-1}$), free length L_f ($\times 10^{11} \text{m}$), free volume V_f ($\times 10^7 \text{m}^3 \text{mol}^{-1}$) and internal pressure π ($\times 10^{-8} \text{Pa}$) of mixture with temperature

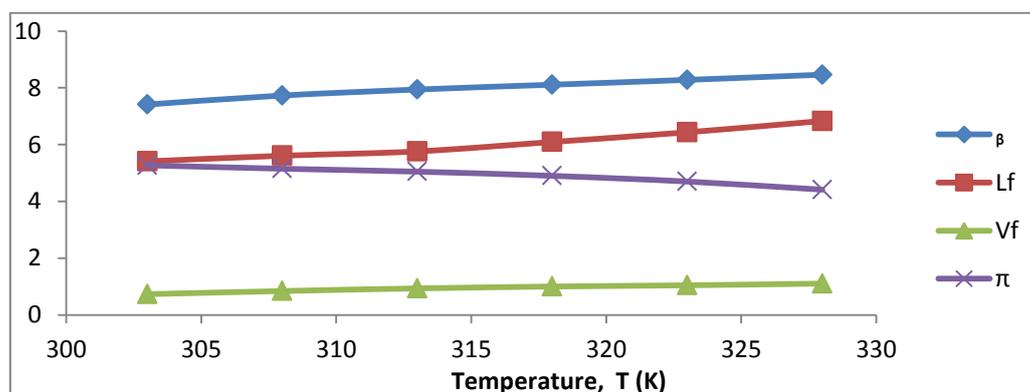

From Figure 1 & 2, it can be seen that ultrasonic velocity (U), adiabatic compressibility (β), free length (L_f), and free volume (V_f), increased almost linearly with increase in temperature. While, internal pressure (π_i) decreased almost linearly with increase in temperature. As may be expected, the density and viscosity of the system decreased with increase in temperature. The molecules in a liquid are held together much more strongly than in a gas. A force is needed to overcome the mutual attraction of the molecules so that they can be displaced relative to each other. The more strongly the molecules are held together, the smaller the flow for a given shearing stress. With increasing temperature, the random kinetic energy of the molecules helps to overcome the molecular forces and reduces the viscosity [4],[9].

CONCLUSION

The ultrasonic velocity and the thermodynamic parameters: adiabatic compressibility, free length, free volume, and internal pressure of methanol+ethanol+Bensene mixture increase as the temperature rises. However, the internal pressure decreases with temperature increase. As usual, the density and viscosity of the ternary mixture decrease with increase

in temperature. This could be due to the energy obtained to overcome the resistance to flow. The almost linear variation of acoustical parameters with temperature shows that there exist less intermolecular forces between the components of the ternary liquid mixture.



REFERENCES

- [1] Bedare G. R., Suryavanshi B. M., Vandakkar V. D.. Acoustical Studies on Binary Liquid Mixture of Methylmethacrylate in 1, 4-Dioxane at 303 K. *International Journal of Advanced Research in Physical Science*, (IJARPS), September 2014, Volume 1, Issue 5, PP 1-5
- [2] Dange S. P., Chimankar O. P. Acoustic Properties of Ternary Liquid Mixture Using Ultrasonic Interferometer Technique, *Global Research Analysis*, July 2013, ISSN No 2277 – 8160, Volume : 2 | Issue : 7, pp 167-168.
- [3] Dikko A. B., Ahmed A. D., Oriolowo N. Z. Effect of Temperature Change on Ultrasonic Velocity and Some Acoustic Parameters of Ternary Liquid Mixture of Methanol+Ethanol+1-Propanol. *International Journal of Applied Research*, IJAR, 2015, 1(3), 75 - 77
- [4] Dikko A. B., Studies on the effects of miscible solute concentration and temperature on certain physical properties of liquids for applications in analysis of liquid mixtures, *PhD Thesis presented to the Department of Physics, Modibbo Adama University of Technology, Yola*, 2014, pp 42 – 44
- [5] Furniss B.S., A.J. Hannaford, P.W.G. Smith and A.R. Tatchell, Vogel's Textbook of Practical Organic Chemistry. 5th Edn., Harlow, Longman, 1989, ISBN: 0-582-46236-3.
- [6] Manoj Kumar Praharaj, Abhiram Satapathy, Prativarani Mishra and Sarmistha Mishra, Ultrasonic studies of ternary liquid mixtures of N-N-dimethylformamide, nitrobenzene, and cyclohexane at different frequencies at 318 K, *Journal of Theoretical and Applied Physics* 2013, 7:23 doi:10.1186/2251-7235-7-23
- [7] Mecke, R. Infra-red spectra hydrocyclic compounds. *Discuss Faraday Soc.*, 1950, 9: 161-177.
- [8] Vasantharani, P. V. Pandiyan and A.N. Kannappan. Ultrasonic velocity, viscosity, density and excess properties of ternary mixture of N-Methylcyclohexylamine+Benzene+1-Propanol. *Asian J. Applied Science.*, 2009, 2: 169-176.
- [9] Vasantharani, P., P. Kalaimagal and A.N. Kannappan, Molecular interaction studies on some organic liquid mixtures at different temperatures using ultrasonic technique. *Asian J. Applied Science*. 2009, 2: 96-100.